

# Explosion Proof Tuning-fork Balance

CZseries

**Stainless steel housing,  
tough body ideally fitted to industrial scene**

- Battery powered for convenient use anywhere  
(Four AA size dry-cell batteries)
- Stainless steel highly resistant to tough conditions
- High speed response & stable indication

WATER & DUST PROOF  
**IP65**



**SHINKO DENSHI CO., LTD.**



**Heavy Duty**  
**Compact**  
**Mobile**



**Stainless steel highly resistant to tough conditions**

Mirror finished stainless steel housing easy to clean, durable to tough conditions.

**High speed response & stable indication**

Unique tuning-fork sensing system achieves the high speed response and stable indication necessary for reliable measurement. The fast response ensures the comfortable and efficient operation.

**Dry-cell battery operation**

No wiring work is necessary. Low energy-consuming design allows CZ series to operate for 200 hours with four AA size alkaline dry-cell batteries (when back-light is OFF).

\*The replacement of dry-cell battery shall be done in safe area



**Clearly visible back-light (with Auto power-off)**

Large LCD (18mm height) with bright back-light make the weighing operation easy and comfortable even in the dark location.

**Arrow keys allow for easy operation**

The arrow keys located to the right of the display allow the user to select their desired function directly from a variety of options.



**Specifications**


Model	CZ-B320	CZ-B620	CZ-B3200	CZ-B6200	CZ-B15K
Capacity	320g	620g	3200g	6200g	15kg
Readability	0.01g	0.01g	0.1g	0.1g	1g
Pan size	φ140mm		190×190mm		
Dimensions(LWH)	212×322×91mm		212×322×91mm		

**Common Specification**

- Tare subtraction range : Full weighing range
- Calibration : Manual operation with external weight
- Temperature/ Humidity : 0°C to 40°C/ 80%RH or less (non-condensing)
- Power source : Four AA size alkaline dry-cell batteries (LR6) or four AA size manganese dry-cell batteries (R6PU) (operate for 200 hours when back-light is OFF)



**Dimensions (mm)**

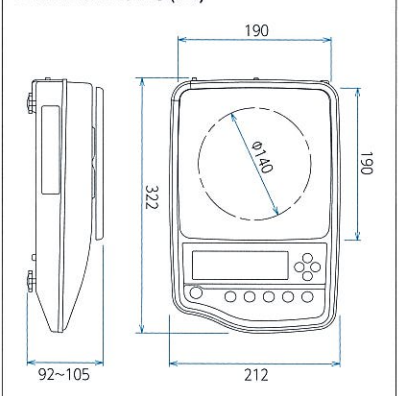

The contents of this catalogue are subject to change due to modifications and/or other reasons.

●Distributed by:

**SHINKO DENSHI CO., LTD.**

3-9-11 YUSHIMA, BUNKYO-KU, TOKYO 113-0034  
TEL : 81-3-3831-9656 FAX : 81-3-5818-6066

URL <http://www.vibra.co.jp/global>  
E-mail [shinko-denshi@vibra.co.jp](mailto:shinko-denshi@vibra.co.jp)



JQA-2834  
JQA-QMA13875



ISO 14001:2004  
ER-00130